

GMC-TC II

ROTARY SHEETER
(HELICAL TWIN KNIFE)



GMC-TC II


ROTARY SHEETER (HELICAL TWIN KNIFE)

SPECIFICATION

Reel Width Trimmed	400 mm - 1,650 mm (16" - 65")
Reel Diameter	Ø 300 mm - 2,100 mm (Ø 12" - 82")
Max. Reel Weight (Per Reel)	3,200 Kg
Standard Tapered Chucks	76 mm - 305 mm (3" - 12")
Speed Curve	Up to 350 M/Min (1,150 ft/Min)
Mechanical Design Knife Loading	1,000 gsm
Cut-Off Range	400 mm - 1,778 mm (18" - 70")
Material Applied	Fine paper to paperboard, coated or uncoated. single or multiple webs.
Max. Pile Height Clearance	1,600 mm (63")
Max. Pile Weight	2,500Kg
Total Electrical Power	380V, 3-Phase, 55 KW, 50Hz/60Hz

* Specifications are subject to change without prior notice.

* We welcome inquiries for special specification requirements.

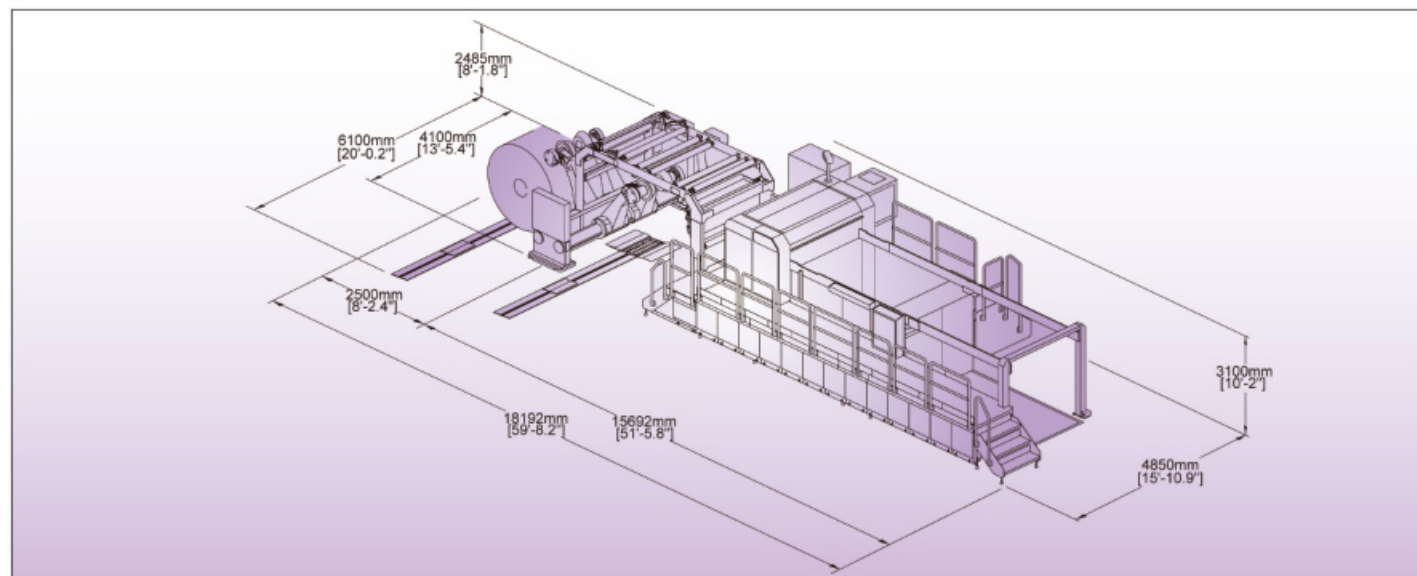

GOODSTRONG MACHINERY CO., LTD.

No. 21, Lane 85, Sec. 1, Chye Tou Rd., Lung Ching, 43443 Taichung, Taiwan.
Tel: +886-4-2635-9981/2365-9936 Email: goodstrong@goodstrong.com.tw
Fax: +886-4-2635-9929/2635-9092/2635-9982 http://www.goodstrong.com.tw

Local Representative



2000.03.2010



ROTARY SHEETER (HELICAL TWIN KNIFE)

GOODSTRONG MACHINERY CO., LTD.